


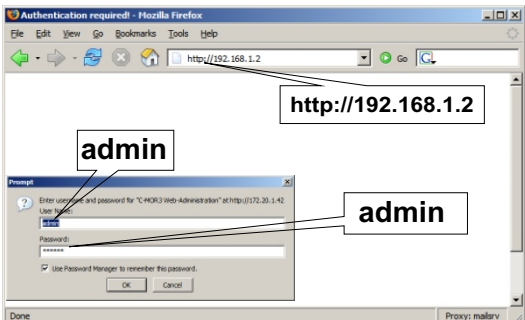
# Quickinstall

### 1 Connect C-MOR to local switch or router



Connect the network port for the use in a local network (LAN) to your switch or router. Once you have connected the network cable to the network port you can switch C-MOR on with the power switch on the front side. The default IP address is 192.168.1.2. You can change the IP address on the VGA console or with the IPsetup Tool.

### 2 Setup the IP address




Make sure your PC has an IP address in the range 192.168.1.0, e.g. **192.168.1.4** and it is connected to the network. Enter the IP address of C-MOR **http://192.168.1.2** in the web browser, e.g. Firefox or Internet Explorer. Next, log in as user "admin" with the password "admin". You have full access to C-MOR's web interface as user admin.

### 3 Connect your camera to the network




Now see the camera manual how to set up a proper IP address on your IP camera. Connect the camera to your local switch or router on a free network port and setup a free IP address in your network. This IP address must be reachable from your C-MOR. You can verify this in the C-MOR System Status page.

### 4 Set up camera in C-MOR WWW administration

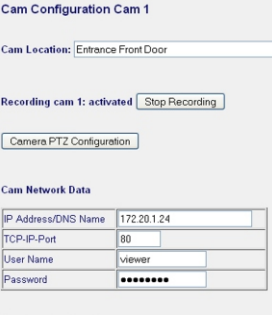

Once you are logged on to the C-MOR Web-Administration, click on Systemadministration tab on the upper menu and scroll down to "Adjust Cam 1." Here you can enter the IP address, username, password and select the camera type and save.


### 5 Use C-MOR

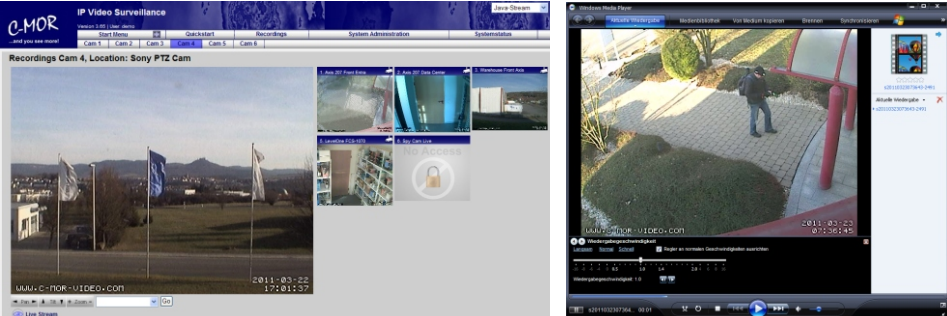

Now C-MOR is up and running. The camera is active, records motion and is set up to record permanent time-lapse movies automatically. Now check in the camera configuration menu again and make sure the parameters, especially the settings for motion detection on top are ok and C-MOR starts recording on motion in the camera picture.

You can select a camera in the menu on the top and just click "Play" in the camera's web page to watch a motion detection sequence. You can select between playing a single sequence or combine it up to one day as one movie for convenient play back.

### 6 C-MOR im Internet

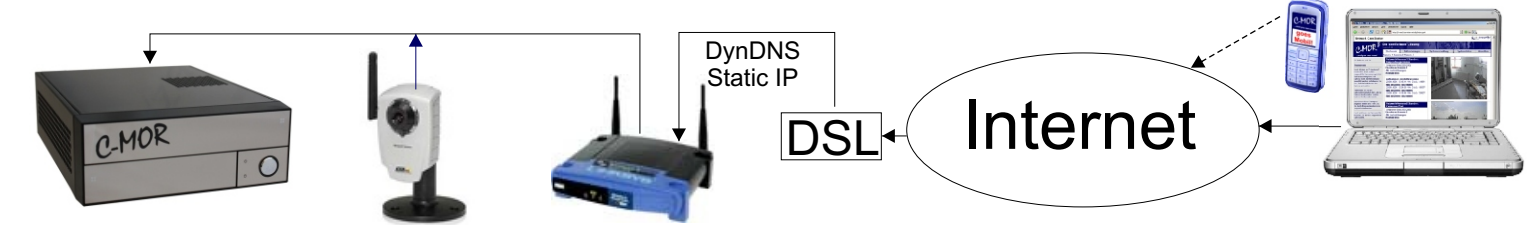

C-MOR can be accessed over Internet without additional software! Your router only needs to support the Dynamic DNS (e.g. Linksys, Zyxel, Netgear, etc.). See your router manual for more details on how to allow access from the Internet like forwarding WWW to C-MOR. Once this is setup, you are able to access C-MOR at an airport terminal or from your wireless device!

C-MOR is very easy to set up. It starts recordings automatically and the standard configuration fits most requirements. Although if you run into problems, we offer professional email and telephone support through our partners to answer your questions.

**NOTICE:** C-MOR gives you ample security and shows you things you are usually not able to see. Please make sure your C-MOR installation conforms to local laws and it is acceptable to use C-MOR at the place you are intending to use it.



C-MOR Inc.  
23785 El Toro Road 226  
Lake Forest, CA 92630  
Phone +1 800 621 9749  
www.c-mor.com